Robbie Pendant

GENERATION LIGHTING
PENDANT

GENERAL PRODUCT INFORMATION:

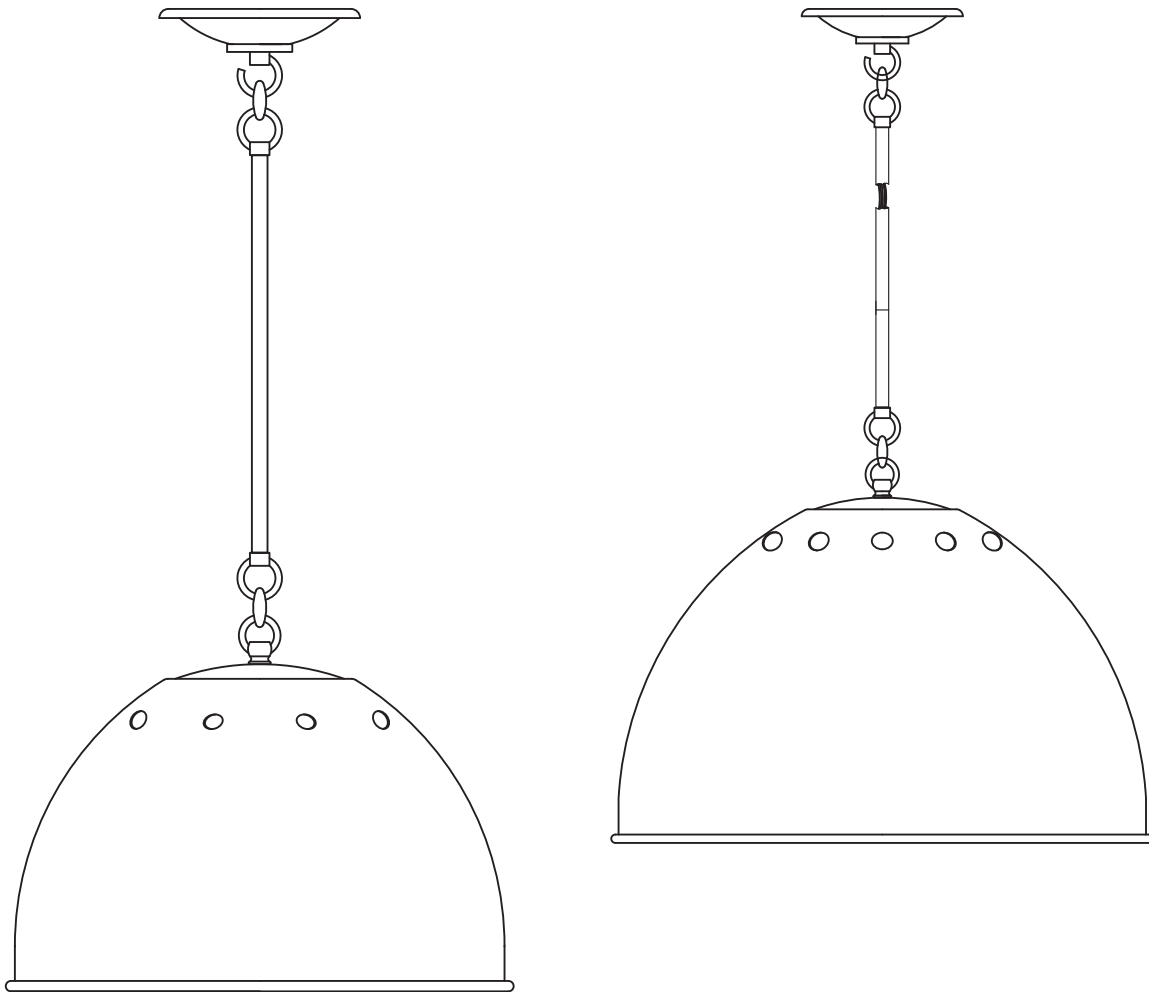These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.
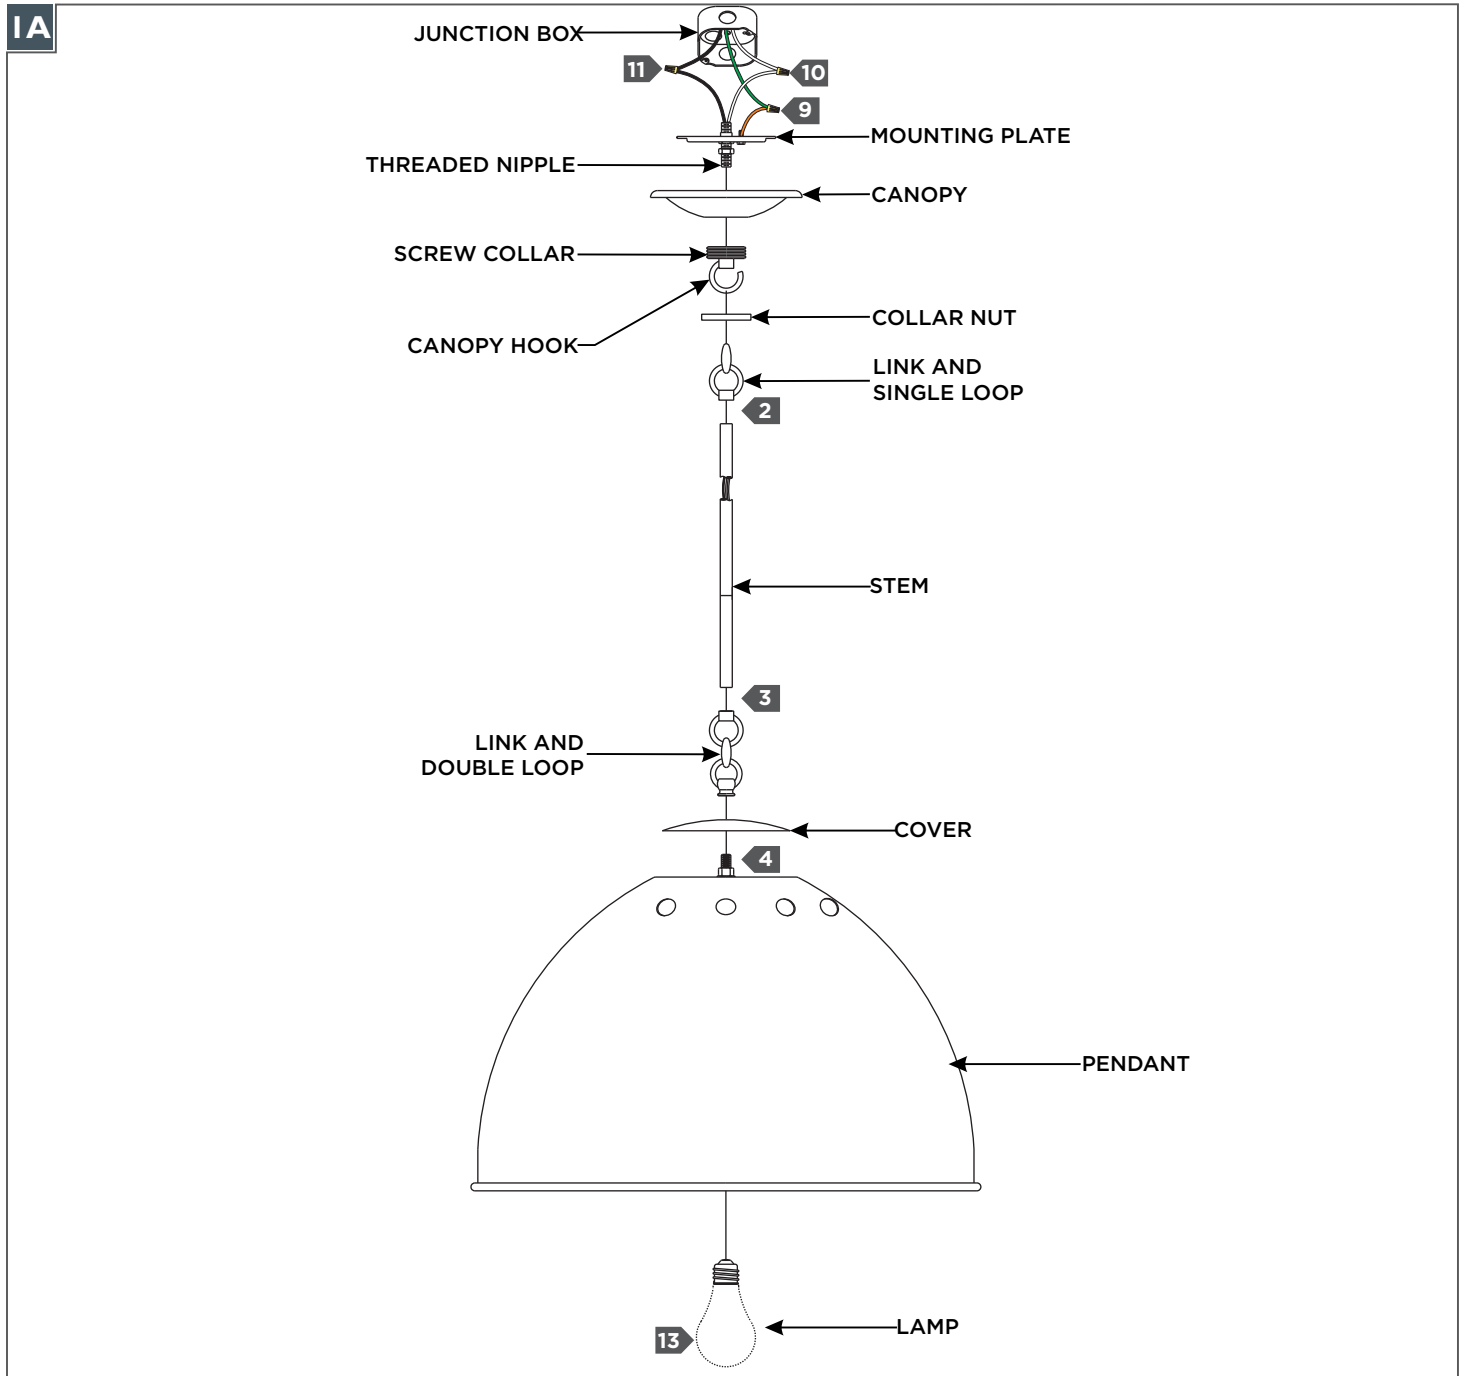
This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

VISUAL COMFORT & CO.

Install the Fixture

IA

JUNCTION BOX

11   **10**

9

MOUNTING PLATE

THREADED NIPPLE

CANOPY

SCREW COLLAR

COLLAR NUT

CANOPY HOOK

LINK AND SINGLE LOOP

2

STEM

3

LINK AND DOUBLE LOOP

COVER

4

PENDANT

LAMP

13

1. Determine the wanted height or look of the fixture with the provided stems and assemble them by screwing them together.
2. Screw the link and single loop to the top of the stem assembly.
3. Screw the link and double loop to the bottom of the stem assembly.
4. Feed the fixture wires through the cover, stem/loops and screw the stem assembly to the top of the pendant.
5. Unscrew the collar nut off the screw collar and place it onto the stem/loop followed by the canopy.
6. Screw the screw collar onto the threaded nipple.
7. Feed the fixture wires through the threaded nipple and hook the stem/loop assembly onto the mounting plate assembly.
8. Align and secure the mounting plate to the junction box.
9. Connect the fixture to a suitable ground in accordance to local electrical codes.
10. Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
11. Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
12. Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
13. Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.